


T. BRANDON AGENCIES LTD.
Unit 3B Rathnew Industrial Estate,
Rathnew,
Co. Wicklow, Ireland
Mobile: 087 9170591
Tel: +353 (0) 404 20 500

sales@brandonagencies.com
www.brandonagencies.com

P RANGE: NON CONDUCTIVE CABLE GRIPS

SINGLE WEAVE , LIGHT DUTY, NON CONDUCTIVE GRIPS

These light duty support grips are manufactured from a durable "man made" fibre giving a high tensile strength. They are available in both single and double eye configurations

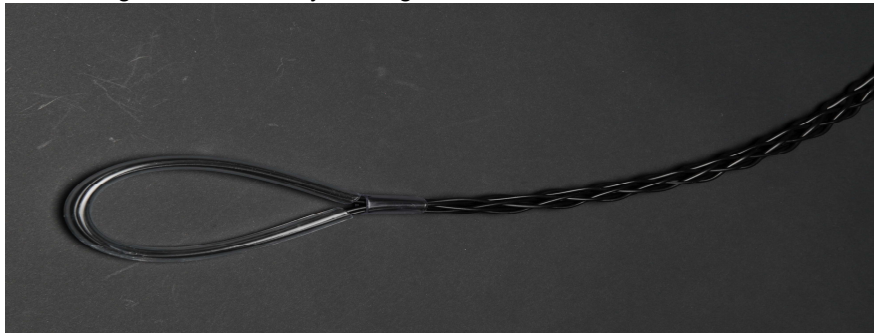

Range mm	SINGLE EYE CLOSED				M.B.S	Weight ea Kg
	Art.No	Type	Weave Length mm			
10 - 20	108 300	P1106/10	600		1120 kg	0.10
20 - 30	108 301	P1106/20	600		1680 kg	0.10
30 - 40	108 302	P1106/30	600		2688 kg	0.11
40 - 50	108 303	P1106/40	600		2688 kg	0.12
50 - 65	108 307	P1106/50	600		2688 kg	0.15

Range mm	DOUBLE EYE				M.B.S	Weight ea Kg
	Art.No	Type	Weave Length mm			
10 - 20	108 310	P1206/10	600		1120 kg	0.10
20 - 30	108 311	P1206/20	600		1680 kg	0.10
30 - 40	108 317	P1206/30	600		2688 kg	0.11
40 - 50	108 318	P1206/40	600		2688 kg	0.12
50 - 65	108 319	P1206/50	600		2688 kg	0.15

Substantial safety ratios have been applied to all quoted minimum-breaking strengths. Additional safety factors, determined by application, should be applied. CGM recommends a minimum safety factor of 3/1 for horizontal pulls and 5/1 for overhead pulling. Due to fatigue, any M.B.S printed will decrease in value after usage.